
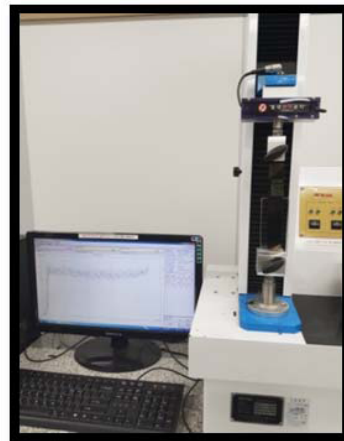


■ 180 degree peel off Adhesive Strength (ASTM D3330)

- ◆ Substrate : SUS304, 50mm x 125mm x 2mm(t)
- ◆ Specimen Dimension : 25mm(W) x 150mm(L)
- ◆ Backing : PET#25 (in case of double side tape)
- ◆ Term of pressure : 1pass back and forth with 2kg roller at RT, 300mm/min
- ◆ Test environment : $23 \pm 2^{\circ}\text{C}$, $50 \pm 5\%$ RH
- ◆ Dwell : After attach the tape, leave it at RT for 0.5hr
- ◆ Peeling : 300mm/min, 180degree

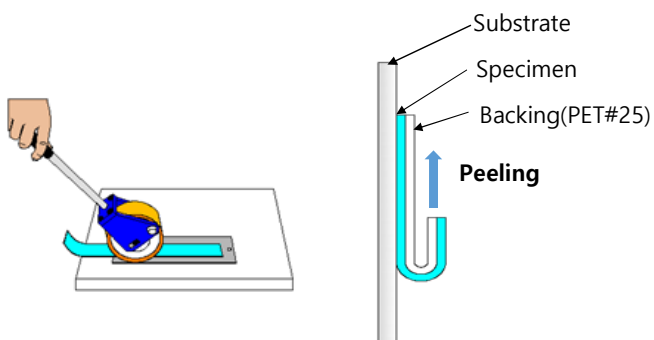

■ 90 degree peel off Adhesive Strength (ASTM D3330)

- ◆ Substrate : SUS304 (50mm x 125mm x 2mm(t))
- ◆ Specimen Dimension : 25mm(W) x 150mm(L)
- ◆ Backing : PET#25 (in case of double side tape)
- ◆ Term of pressure : 1pass back and forth with 2kg roller at RT, 300mm/min
- ◆ Test environment : $23 \pm 2^{\circ}\text{C}$, $50 \pm 5\%$ RH
- ◆ Dwell : After attach the tape, leave it at RT for 0.5hr
- ◆ Peeling : 300mm/min, 90degree

